


Standard Equipment

Model	Fuel Consumption			CO ₂ Emissions	Road Tax
3.2 DID 4WD 200PS 5MT SWB 2-Seater Commercial	7.8 l/100km			207g/km	€333
3.2 DID 4WD 200PS 5MT LWB 2-Seater Commercial	8.1 l/100km			213g/km	€333
3.2 DID 4WD 200PS 5AT LWB 5-Seater Executive 17MY	9.3 l/100km			245g/km	€333


Exterior	SWB	LWB	Executive	Comfort & Convenience	SWB	LWB	Executive
	2-Seater MT	2-Seater MT	5-Seater AT		2-Seater MT	2-Seater MT	5-Seater AT
18" Alloy Wheels with Full Size Spare Tyre	●	●	●	Touch Screen Audio Display with LW/MW/FM Radio, CD Player & 6 Speakers	●	●	
Front Foglights	●	●	●	Smartphone Link Display Audio (SDA) with 7" Touch Screen Display featuring Apple CarPlay / Android Auto™, AM/FM & DAB Radio with 12 Speakers (860W)			●
Electric / Heated / Folding Door Mirrors	●	●	●	Rear View Camera	●	●	●
LED Daytime Running Lights	●	●	●	Sunroof			●
LED Position Lamp	●	●	●	Front Auto Air Conditioning	●	●	●
Xenon Headlights with Auto Levelling & Headlamp Washers	●	●	●	Rear Manual Air Conditioning			●
Rear Privacy Glass			●	Rear Parking Sensors		●	●
Black Roof Rails	●	●	●	Cruise Control	●	●	●
Side Steps	●	●	●	Bluetooth Handsfree System	●	●	●
Colour-keyed Side Door Garnish & Front & Rear Bumpers & Black Side Sill Garnish	●	●	●	USB Port / i-Pod Connectivity	●	●	●
Colour-keyed Door Mirror with Side Indicator & Approach Lamp, License Plate Garnish, Exterior Door Handles	●	●	●	HDMI Connectivity			●
Chrome Front Grille, Silver Rear Bumper Center	●	●	●	Auto Dimming Rearview Mirror	●	●	●
Front & Rear Mudguards	●	●	●	Electric Windows with One-touch Operation & Anti-trapping Function	●	●	●
Rear Spoiler			●	Keyless Entry System (2 keys)	●	●	●
Automatic Light Control			●	Remote Audio Controls on Steering Wheel	●	●	●
Rain Sensor Wipers			●	Ashtray & Cigar Lighter	●	●	●
				External Temperature Gauge & Trip Computer	●	●	●
				12V Accessory Sockets x3	●	●	●

Interior Styling & Storage	SWB	LWB	Executive	Safety & Security	SWB	LWB	Executive
	2-Seater MT	2-Seater MT	5-Seater AT		2-Seater MT	2-Seater MT	5-Seater AT
Leather Seat Upholstery			●	Multi-mode Anti-lock Braking System (ABS) with Electronic Brake Force Distribution (EBD) & Brake Assist System	●	●	●
Heated, 4-way Electrically Adjustable Front Seats			●	Active Stability Control (ASC) & Traction Control (TCL)	●	●	●
Multi-function Leather Steering Wheel & Leather Gearshift Knob	●	●	●	Tyre Pressure Monitoring System	●	●	●
Leather Formed Type Door Trims			●	Super Select 4WD (SS4-II)	●	●	●
Metallic Interior Trim	●	●	●	Front / Side / Curtain Airbags with Front Passenger Airbag Deactivation	●	●	●
Chrome Interior Door Handle	●	●	●	3 Point ELR Seatbelt with Pretensioner x2 (Executive x5)	●	●	●
Slide-adjustable Armrest for Front Seat with Integrated Storage	●	●	●	Mechanical Theft Protection	●	●	●
Fully Flat Seats, 1st Row	●	●	●	Electronic Immobiliser	●	●	●
Folding & Tumbling Seats, 2nd Row (Executive Only)			●	Door Courtesy Light, Front & Rear (Rear LWB models only)	●	●	●
Front Cup Holders x2	●	●	●	Lockable Glovebox with Lamp	●	●	●
Rear Center Armrest with Cup Holders x2			●	ISO-fix Child Seat Anchors			●
Front Room Lamp with Map Lamp	●	●	●				
LED Foot Light & Ceiling Lamp	●	●	●				
Luggage Room Lamp, Luggage Room Hooks x4	●	●	●				

SWB Commercial

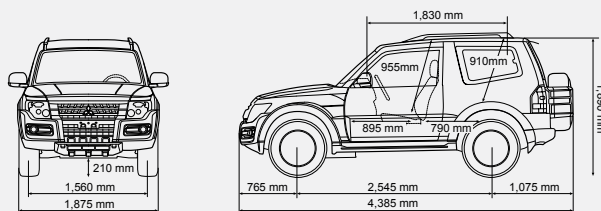

LWB Commercial & Executive

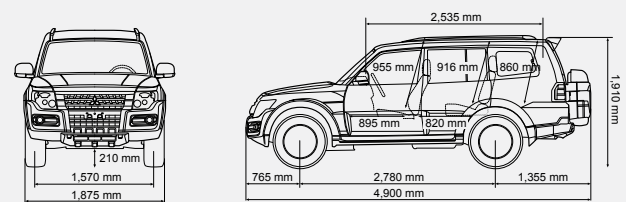

MODEL	Pajero 3.2 DI-D SWB 4WD 2-Seater 5MT		Pajero 3.2 DI-D LWB 4WD 2-Seater 5MT		17MY Pajero 3.2 DI-D LWB 4WD 5-Seater 5AT	
Dimensions & Weights						
Overall length, with rear bumper (mm)	4,385		4,900		4,900	
Overall width (mm)			1,875			
Overall height (mm)	1,890		1,910		1,910	
Wheelbase (mm)	2,545		2,780		2,780	
Front overhang (mm)			765			
Rear overhang (mm)	1,075		1,355		1,355	
Track Front (mm)	1,560		1,570		1,570	
Track Rear (mm)	1,560		1,570		1,570	
Cargo room capacity (VDA measurement method)	Maximum capacity up to roof (litre) 1,120		1,790		1,790	
Min ground clearance (mm)			210			
Cargo floor height (mm)	733		751		751	
Cargo floor length (mm)	1,262		1,755		1660 (max)	
Kerb weight (kg)	2,001		2,185		2,230	
Gross vehicle weight (kg)	2,705		3,030		3,030	
Engine						
Type	4M41 DI-D Common-Rail I/C T/C					
Construction	Longitudinally mounted 4-cylinder, 4 stroke, DOHC, 4 valves per cylinder					
Total displacement (cc)	3,200					
Bore x stroke (mm)	98.5 x 105.0					
Fuel type	Diesel					
Injection System	Electronically Common-Rail direct Injection with centrally mounted injection valves					
Emission level	Euro-5b		Euro-5b		Euro-6b	
Max Output (EEC net) (kW(PS)/rpm)	147 (200) / 3,800		147 (200) / 3,800		140 (190) / 3,500	
Max Torque (EEC net) (Nm/rpm)	441 / 2,000					
Performance						
Max axle load	Front (kg)	1,250		1,330		1,330
	Rear (kg)	1,600		1,780		1,780
Towing capacity with brake (on 12% incline) (kg)	3,000		3,500		3,500	
Towing capacity w/o brake (on 12% incline) (kg)			750			
Maximum loading capacity on the roof rails (kg)			100			
Seating capacity (persons)	2		2		5	
Acceleration (0-100 km/h)	9.7		10.5		10.5	
Max Speed (km/h)			180			
Transmission						
Type	5-speed manual		INVECS-II 5 speed automatic with Sports Mode			
Clutch Type	Single, dry plate with diaphragm spring		Torque converter			
Gear Ratio	1st	4.234		4.234		3.520
	2nd	2.238		2.238		2.042
	3rd	1.398		1.398		1.400
	4th			1.000		
	5th	0.760		0.760		0.716
	Reverse	3.553		3.553		3.224
Transfer gear ratio Low			1.000			
Transfer gear ratio High			1.900			
Final			3.692			
Suspension						
Front	Double wishbone coil springs with stabiliser bar					
Rear	Multi-link coil springs with stabiliser bar					
Brakes						
Brake system			Hydraulic brake booster			
Front	16" ventilated discs (4-pot)		17" ventilated discs (4-pot)		17" ventilated discs (4-pot)	
Rear	16" ventilated drum-in-discs		17" ventilated drum-in-discs		17" ventilated drum-in-discs	
Fuel Economy						
Urban l/100km	9.55		9.6		10.5	
Extra Urban l/100km	6.9		7.2		8.6	
Combined l/100km	7.8		8.1		9.3	
CO ₂ Combined g/km	207		213		245	
Steering						
Type	Rack-and-pinion (power assisted)					
Tyres						
Wheels	18" Alloy					
Size	265 / 60 R18					
Off-Road Performance						
Approach angle/ramp break over angle/departure angle	34.3 / 26.0 / 35.5		34.1 / 22.9 / 25.7		34.1 / 22.9 / 25.7	
Wading depth (mm)			700			
Climbing ability (tan0)			0.7			
Inclination angle (deg)			45			
Max axle travel	Front (mm)			220		
	Rear (mm)	270		260		260
4WD System (All Wheel Control)	Super Select 4WD-II (SS4-II)					